


204.95 EUR  
incl. 19% VAT, plus [shipping](#)

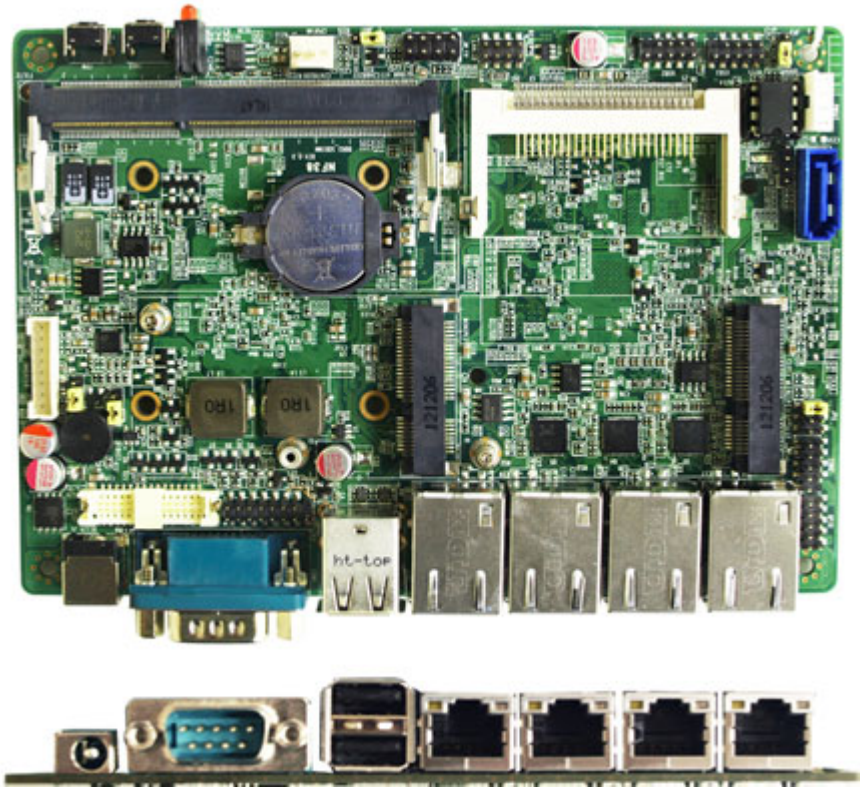

- INTEL® Pine Trail-D Processor D525+ ICH8M Chipset
- Support 1 \* DDR3 667/800MHz Single CH up to 2GB
- 3. Support 1 \* Serial ATAI (3Gb/s) Devices
- 1 \* 18 bits Single Channel LVDS header
- Supports 4 \* Realtek RT8111EVL Gigabit LAN
- Provides 2 \* Mini PCI-E socket (one support mSATA card)
- Provides 1 \* CF card socket (can support both CF card & CF SATA card)
- Provides 1 \* SIM card socket (optional)
- Provides front I/O card for 4 \* LAN LED indicators
- Support CPU Smart FAN
- Compliance with ErP standard
- 148 x 102mm 3.5" SBC Form Factor

|                         |                                                                                            |
|-------------------------|--------------------------------------------------------------------------------------------|
| <b>CPU</b>              | INTEL® Pine Trail-D Processor D525 (1.86GHz)                                               |
| <b>Chipset</b>          | INTEL® ICH8M Express chipset                                                               |
| <b>Memory</b>           | 1 * DDR3 667/800MHz Single CH SO-DIMM up to 2GB                                            |
| <b>Expansion Slots</b>  | 2 * full size Mini PCI-E                                                                   |
| <b>Storage</b>          | 1 * Serial ATAI 3Gb/s connectors<br>1 * mSATA socket (Share with one of Mini PCI-E socket) |
| <b>Audio</b>            | N/A                                                                                        |
| <b>Ethernet LAN</b>     | 4 * RTL8111E PCI-EVL Gigabit LAN                                                           |
| <b>USB</b>              | Embedded 6 * USB 2.0/1.1                                                                   |
| <b>LVDS</b>             | Onboard 1 * 18-bits Single CH LVDS connectors                                              |
| <b>Rear Panel I / O</b> | 2 * USB 2.0/1.1 ports<br>1 * COM port<br>4 * RJ-45 ports<br>1 * 12V DC-IN JACK             |

|                       |                                                                                                                                                                                                                                                                                        |
|-----------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Internal I / O</b> | 2 * USB 2.0 header for 4 * USB 2.0 ports<br>1 * VGA header<br>1 * COM header (COM2 for RS232/422/485)<br>1 * GPIO header<br>1 * CIR header<br>System/Chassis/NB Fan Connectors<br>1 * CF card socket (can support both CF card & CF SATA card)<br>DIY switch x2 (reset & power button) |
| <b>BIOS</b>           | AMI 8MB DIP Flash ROM                                                                                                                                                                                                                                                                  |
| <b>Form Factor</b>    | 3.5" SBC form factor (148mmx102mm)                                                                                                                                                                                                                                                     |
| <b>Certificate</b>    | CE,FCC,RoHS,ERP                                                                                                                                                                                                                                                                        |
| <b>Functional</b>     | Networking Appliance                                                                                                                                                                                                                                                                   |
| <b>Temperature</b>    | Operating within 0~60 centigrade<br>Storage within -20-85 centigrade                                                                                                                                                                                                                   |

**Product Accessories**

- Front I/O card
- Front panel cable
- NIC LED cable
- USB cable
- Manual
- CD
- 1x SATA cable
- SATA power cable