


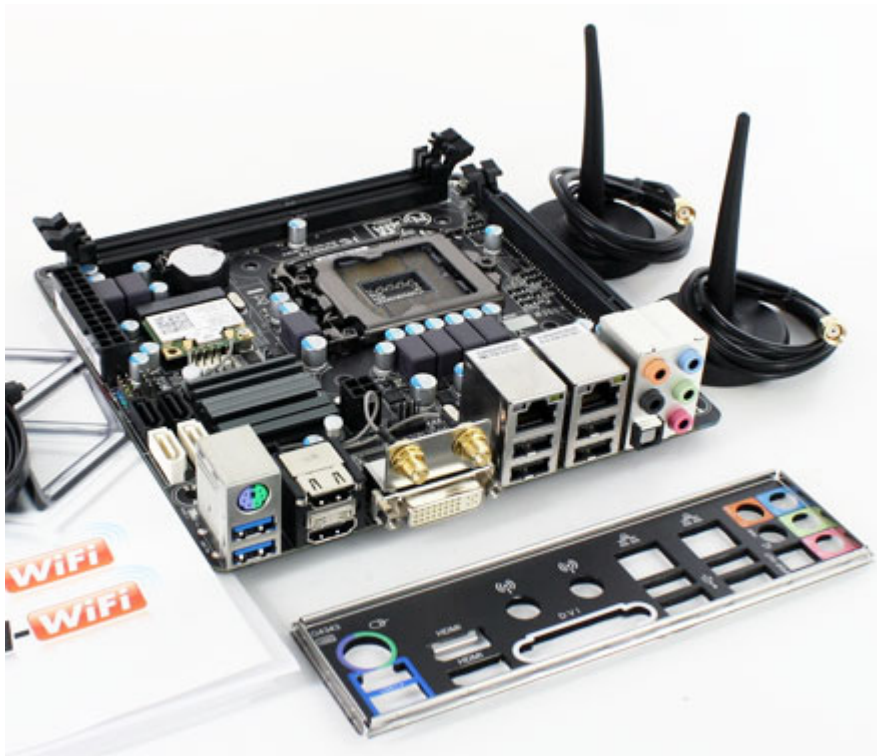

109.95 EUR

incl. 19% VAT, plus [shipping](#)

- Intel WiFi, Intel WiDi !
- Dual Gigabit LAN !
- Gigabyte Features !
- Intel Ivy/Sandy Bridge !

#### Features :

- Intel H77
- RAM: 2x DDR3
- Expansion: 1x PCIe 3.0 x16
- External : 1x DVI-I, 2x HDMI, 2x USB 3.0, 4x USB 2.0, 2x Gb LAN (Realtek), 7.1 Audio (ALC892), 1x PS/2 Combo
- Internal: 2x USB 3.0, 2x USB 2.0, 2x SATA 6Gb/s, 2x SATA II, 1x CPU-Lüfter PWM, 1x Lüfter PWM, 1x serial
- Notes: Mini-ITX, UEFI, All Solid Capacitors, WLAN 802.11b/g/n, Bluetooth 4.0

1. Support for Intel® Core™ i7 processors/Intel® Core™ i5 processors/Intel® Core™ i3 processors/Intel® Pentium® processors/Intel® Celeron® processors in the LGA1155 package

#### CPU

2. L3 cache varies with CPU

(Some Intel® Core™ processors require a graphic card, please refer "CPU support List" for more information.)

#### Chipset

1. Intel® H77 Express Chipset

---

|                               |                                                                                                                                                                                                                                                                                    |
|-------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Memory                        | 1. 2 x 1.5V DDR3 DIMM sockets supporting up to 16 GB of system memory<br>* Due to a Windows 32-bit operating system limitation, when more than 4 GB of physical memory is installed, the actual memory size displayed will be less than the size of the physical memory installed. |
|                               | 2. Dual channel memory architecture                                                                                                                                                                                                                                                |
|                               | 3. Support for DDR3 1600/1333/1066/800 MHz memory modules<br>* To support DDR3 1600 MHz, you must install an Intel 22nm (Ivy Bridge) CPU.                                                                                                                                          |
|                               | 4. Support for non-ECC memory modules                                                                                                                                                                                                                                              |
|                               | 5. Support for Extreme Memory Profile (XMP) memory modules<br><br>(Please refer "Memory Support List" for more information.)                                                                                                                                                       |
| Onboard Graphics              | Integrated Graphics Processor:                                                                                                                                                                                                                                                     |
|                               | 1. 1 x DVI-I port, supporting a maximum resolution of 1920x1200<br><br>2. 2 x HDMI ports, supporting a maximum resolution of 1920x1200                                                                                                                                             |
| Audio                         | 1. Realtek ALC892 codec                                                                                                                                                                                                                                                            |
|                               | 2. High Definition Audio                                                                                                                                                                                                                                                           |
|                               | 3. 2/4/5.1/7.1-channel                                                                                                                                                                                                                                                             |
|                               | 4. Support for S/PDIF Out                                                                                                                                                                                                                                                          |
| LAN                           | 1. 2 x Realtek GbE LAN chip (10/100/1000 Mbit)                                                                                                                                                                                                                                     |
| Wireless Communication module | 1. Wi-Fi 802.11 b/g/n, Supports Intel Wireless Display (WiDi)                                                                                                                                                                                                                      |
|                               | 2. Bluetooth 4.0, 3.0+HS, 2.1+EDR                                                                                                                                                                                                                                                  |
| Expansion Slots               | 1. 1 x PCI Express x16 slot, running at x16<br>(The PCIEX16 slot conforms to PCI Express 3.0 standard.)<br>* Whether PCI Express 3.0 is supported depends on CPU and graphics card compatibility.                                                                                  |

**Chipset:****Storage  
Interface**

1. 2 x SATA 6Gb/s connectors (SATA3 0/1) supporting up to 2 SATA 6Gb/s devices
2. 2 x SATA 3Gb/s connectors (SATA2 2/3) supporting up to 2 SATA 3Gb/s devices
3. Support for RAID 0, RAID 1, RAID 5, and RAID 10  
\* When a RAID set is built across the SATA 6Gb/s and SATA 3Gb/s channels, the system performance of the RAID set may vary depending on the devices being connected.

**Chipset:****USB**

1. Up to 4 USB 3.0/2.0 ports (2 ports on the back panel, 2 ports available through the internal USB header)
2. Up to 6 USB 2.0/1.1 ports (4 ports on the back panel, 2 ports available through the internal USB header)

**Internal I/O  
Connectors**

1. 1 x 24-pin ATX main power connector
2. 1 x 4-pin ATX 12V power connector
3. 1 x serial port header
4. 2 x SATA 6Gb/s connectors
5. 2 x SATA 3Gb/s connectors
6. 1 x USB 3.0/2.0 header
7. 2 x USB 2.0/1.1 headers
8. 1 x CPU fan header
9. 1 x system fan header
10. 1 x front panel header
11. 1 x front panel audio header
12. 1 x S/PDIF Out header
13. 1 x Clear CMOS jumper

|                                                                                                      |                                                                                                |
|------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------|
| Back Panel Connectors                                                                                | 1. 1 x PS/2 keyboard/mouse port                                                                |
|                                                                                                      | 2. 2 x HDMI ports                                                                              |
|                                                                                                      | 3. 2 x antenna connectors                                                                      |
|                                                                                                      | 4. 1 x DVI-I port                                                                              |
|                                                                                                      | 5. 2 x USB 3.0/2.0 ports                                                                       |
|                                                                                                      | 6. 4 x USB 2.0/1.1 ports                                                                       |
|                                                                                                      | 7. 2 x RJ-45 ports                                                                             |
|                                                                                                      | 8. 1 x optical S/PDIF Out connector                                                            |
|                                                                                                      | 9. 5 x audio jacks (Center/Subwoofer Speaker Out, Rear Speaker Out, Line In, Line Out, Mic In) |
| I/O Controller                                                                                       | 1. iTE I/O Controller Chip                                                                     |
| H/W Monitoring                                                                                       | 1. System voltage detection                                                                    |
|                                                                                                      | 2. CPU/System temperature detection                                                            |
|                                                                                                      | 3. CPU/System fan speed detection                                                              |
|                                                                                                      | 4. CPU fan speed control                                                                       |
| * Whether the CPU fan speed control function is supported will depend on the CPU cooler you install. |                                                                                                |
| BIOS                                                                                                 | 1. 2 x 64 Mbit flash                                                                           |
|                                                                                                      | 2. Use of licensed AMI EFI BIOS                                                                |
|                                                                                                      | 3. Support for DualBIOS™                                                                       |
|                                                                                                      | 4. PnP 1.0a, DMI 2.0, SM BIOS 2.6, ACPI 2.0a                                                   |

1. Support for @BIOS
2. Support for Q-Flash
3. Support for Xpress Install
4. Support for EasyTune  
\* Available functions in EasyTune may differ by motherboard model.
5. Support for eXtreme Hard Drive (X.H.D)

#### Unique Features

6. Support for Auto Green
7. Support for ON/OFF Charge
8. Support for Q-Share
9. Support for EZ Setup
10. Support for Intel Wireless Display (Intel WiDi)
11. Exclusive Bluetooth 4.0/WiFi module

#### Bundle Software

1. Norton Internet Security (OEM version)
2. Intel® Rapid Start Technology
3. Intel® Smart Connect Technology
4. Intel® Smart Response Technology

#### Operating System

1. Support for Microsoft® Windows 8/7/XP

#### Form Factor

1. Mini-ITX Form Factor; 17.0cm x 17.0cm

#### Remark

1. Due to different Linux support condition provided by chipset vendors, please download Linux driver from chipset vendors' website or 3rd party website.
2. Most hardware/software vendors may no longer offer drivers to support Win9X/ME/2000/XP SP1/SP2. If drivers are available from the vendors, we will update them on the GIGABYTE website.