


999.00 EUR

incl. 19% VAT, plus [shipping](#)

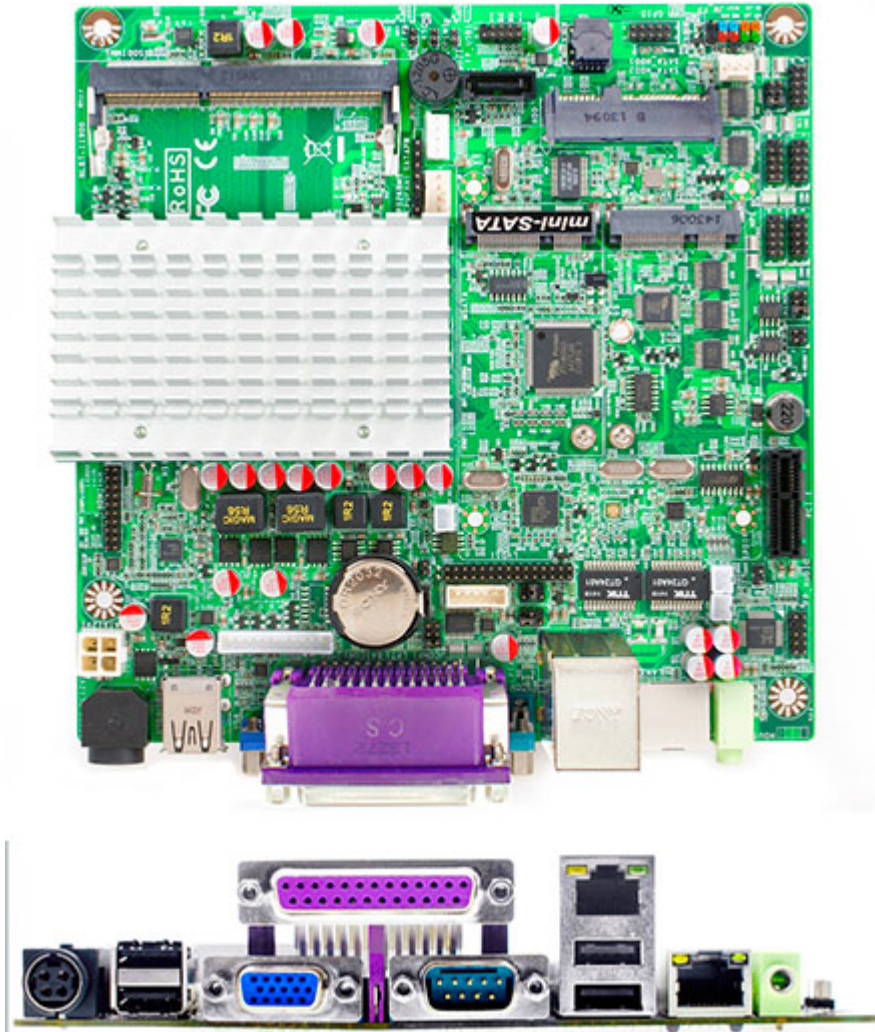

- Intel® Celeron™ J1900 (2.0 GHz) quad-core processor
- Support DirectX 11 3D Graphics Acceleration
- Support DDR3L 1333
- Integrated HD Audio CODEC
- Support 2*PCI Express Gigabit LAN
- Support Power Onboard(12V)
- Onboard 1*MiniPCI-E connector
- Onboard 1 *M- SATA connector
- 2 Phase CPU Power Support
- Support Slim Fan design
- Support Slim hard drive design
- Support Amplifier function(3W)
- Support Thunder Protection Function
- [Thin mini ITX](#) Form Factor(170mm X170mm)

CPU-Chipset	• INTEL® Celeron™ J1900 (2.0 GHz) quad-core processor • 2 Phase CPU Power Support
I.O Chipset	• Fintek F71869
Memory	• 1*SO-DIMM slot • Support DDR3L 1333 • Max. capacity of system memory up to 8GB
Expansion Slots	• 1 * MiniPCI-E connector • 1* PCIe1 slot

• Storage	1* Serial ATA2 3Gb/s connector or 1*SATA +Power Connector(7+15Pin) 1 * M-SATA Connector
• Audio	- ALC887 Audio CODEC - HD Audio CODEC
• Ethernet LAN	- Realtek® RTL8111G Chip 2*PCI Express Gigabit LAN
• LVDS	Onboard 24-bit Dual channel
• USB	6* USB 2.0/1.1(4 distribute in back panel, 2 distribute in mid-board)
• Special Features	- Support CPU Smart Fan - Support Watch dog Technology - Support GPIO Technology - Support VGA header - Support HDIM header - Support Power On board - Support Amplifier function(3W) - Support Slim Fan design Support Slim hard drive design - Support 1*RS422/RS485/RS232 COM port - Thunder Protection Function - All Solid Capacitor design All Power Pack MOSFET design
• Back Panel I / O	4* USB 2.0/1.1 ports 2* RJ-45 port 1* Print Port 1* Line-out connector 1 * VGA port 1 * COM port (1*RS422/RS485/RS232 COM port) 1* 12V DC in
• Internal I / O	1* USB 2.0/1.1 headers for 2 USB 2.0/1.1 ports 2*CPU / Chassis Fan connectors 5*COM headers 1*PS2/KB header 1 *4-pin ATX 12V Power connector 1 *4-pin SATA Power connector 1 *15-pin VGA header 1 *20-pin HDMI header 1 *24-bit Dual Channel LVDS header 1 *GPIO header 1 *Mini PCI-e connector 1 * M-SATA Connector 1* SATA+Power Connector(7+15Pin)(Option) 1 * Audio header 1 * Front panel header 1* HDMI_SPDIFheader
• BIOS	AMI 32MB DIP Flash ROM
• Form Factor	Thin mini ITX Form Factor(170mm X 170mm)